



NORDUGRID-MANUAL-5

5/9/2003

THE GRID MONITOR

Usage manual

Oxana Smirnova*

Abstract

The Grid Monitor is a Web interface to the NorduGrid Information System, allowing to browse all the published information about the system. It makes use of the hierarchical information organization and the PHP4 LDAP module to provide a real-time monitoring and a primary debugging for the NorduGrid testbed.

*O.Smirnova@cern.ch

1 Introduction

Information services play a very important role in any computational grid architecture, being a nerve system of the Grid. Resource discovery, scheduling, monitoring and many other tasks are impossible without a reliable and up-to-date information about system components.

The MDS-based [1] NorduGrid [2] Information System [3] provides a robust and dynamic model for accessing not only quasi-static information about resources and services, but also about such rapidly changing parameters like queue and job status. Being based on OpenLDAP [4], it can be easily interfaced to any browsing or monitoring tool, giving thus a user-friendly overview of all the testbed resources.

The Grid Monitor makes use of the LDAP module of PHP4 [5] to provide a Web interface to the information infrastructure. This document gives a summary of its capabilities and usage guidelines.

2 Grid Monitor Modules

The structure of the Grid Monitor to great extent follows that of the NorduGrid Information System [3]. The basic objects are defined by the following schema's objectclasses:

- nordugrid-cluster: a cluster
- nordugrid-queue: a queue at the cluster, accessible by the NorduGrid users
- nordugrid-job: a NorduGrid job, associated with a queue
- nordugrid-authuser: a user, authorized to submit jobs to a given queue

The Grid Monitor also uses the NorduGrid Virtual Organisation (VO) organisationalPerson and Storage Element nordugrid-se objectclasses, and their attributes.

For each objectclass, either an essential subset of attributes, or the whole list of them, is presented in an easily accessible inter-linked manner. This is realized as a set of windows, each being associated with a corresponding module. There are nine major modules :

- 1) An overall Grid Monitor
- 2) Cluster Description
- 3) Queue Details
- 4) Job Information
- 5) User Information
- 6) Attributes Overview
- 7) Customizable Display Tool ("Match-it-yourself")
- 8) List of Storage Facilities
- 9) List of Users

Each module displays both dynamic and static information: for example, a queue name is static, while the amount of running jobs in this queue is dynamic. Most of the displayed objects are linked to appropriate modules, such that with a simple mouse click, a user can launch another module, expanding the information about the corresponding object or attribute. Each such module opens in an own window, and gives access to other modules in turn, providing thus a rather intuitive browsing.

In what follows, these modules are described in details, giving an overview of their functionality and usage hints.

2.1 The Grid Monitor

The basic module, providing access to the most required information, is the Grid Monitor, showing the overall status of the system. It serves as a starting point for browsing the system information. The purpose of this module is to give a quick overview of the current status of the NorduGrid by showing the list of the available clusters and the most essential information about them: an alias, number of working processors, number of occupied processors and number of queueing jobs. In the current implementation, the main Grid Monitor window contains also the link to the user base of the NorduGrid. Figure 1 shows a screenshot of the running monitor. All the information shown is dynamic, including organizational names (countries in this case).

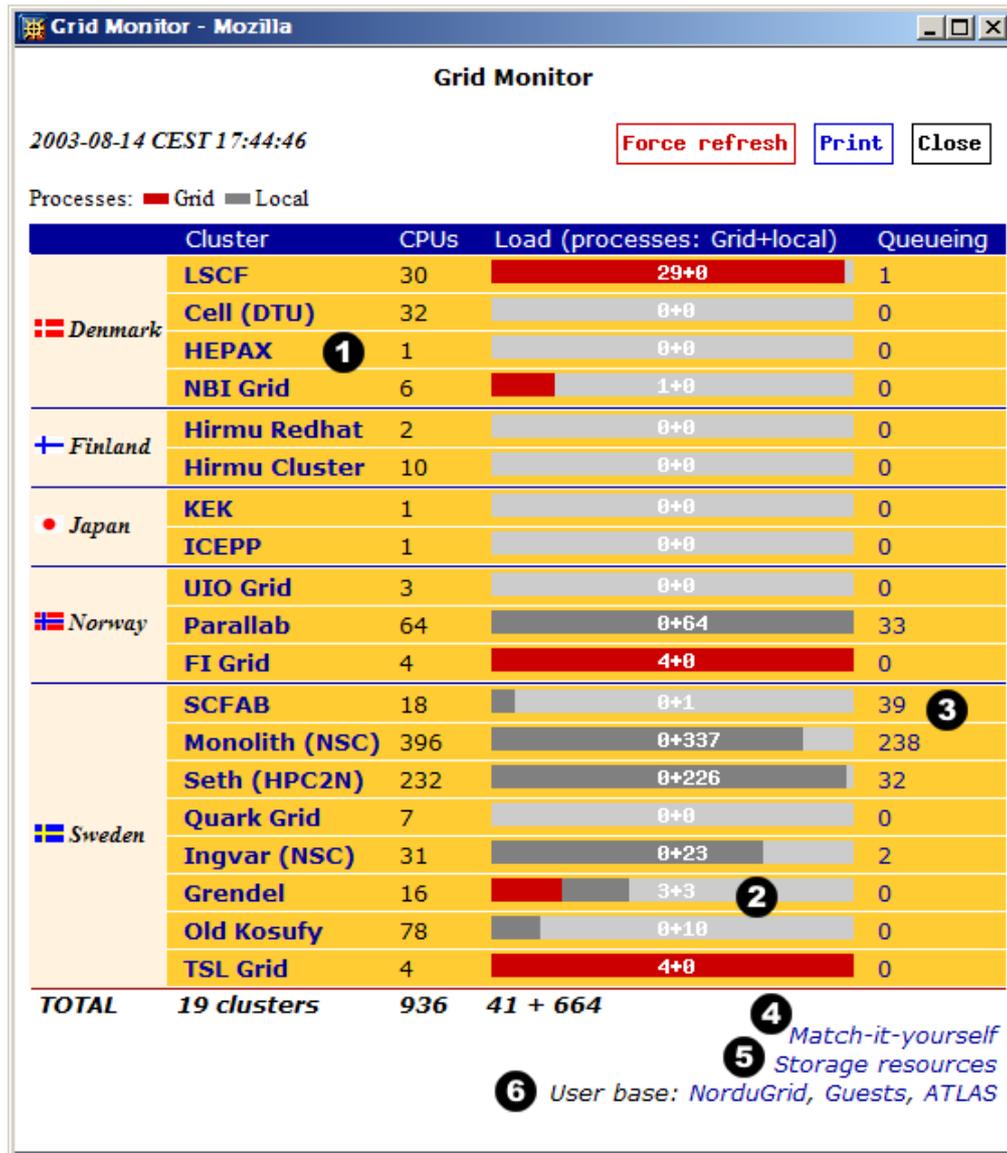


Figure 1: The Grid Monitor

In Figure 1, the numbered tags indicate clickable objects as explained below:

- 1) Cluster: a cluster alias, linked to the cluster description module (Section 2.2), which provides complete information about the current status of a cluster.
- 2) Load: a graphical and numeric representation of the cluster load, showing both Grid- and non-Grid (submitted locally) running processes. Red bar shows percentage of NorduGrid processes, while the grey bar shows total relative occupancy of a cluster. Numbers indicate the absolute amount of running processes, with first figure corresponding to the Grid, and second - to the non-Grid ones. It should

be noted that number of processes does not necessarily correspond to the number of running jobs: a parallel job can occupy several processors. By clicking on a bar, a user accesses the list of all Grid jobs, running on a cluster (Section 2.4).

- 3) **Queueing:** number of queueing jobs, which includes both jobs queued in an LRMS and those being pre-processed by the Grid Manager [6]. Only jobs which can be potentially executed in a Grid queue are counted. The number is linked to the same module as the **Load** item, with the only difference that it displays the list of the Grid-queued jobs. Note that non-Grid jobs are counted in the total number of queued jobs, while they can not be listed by the Grid Monitor, as they are not providing any information in the NorduGrid Information System.
- 4) **Match-it-yourself:** link to the “Match-it-yourself” interface (Section 2.7) which allows users to compose non-standard monitor requests.
- 5) **Storage resources:** link to the list of available storage resources (Section 2.8).
- 6) **User base:** several auxiliary links, providing an access to the VO-listing module (Section 2.9). The main purpose of this link is to provide an easy access to the user-specific information, such as the list of submitted jobs and available resources.

2.2 Cluster Description

The cluster description module displays all the cluster attributes stored in the MDS, as well as most relevant information about the queues, accessible by the NorduGrid users. The window thus contains two lists, as shown in Figure 2:

- 1) **Attributes:** this is a dump of all the attributes of the `nordugrid-cluster` objectclass, dynamic and static ones. Such attributes as cluster alias, or domain name, are static; others are dynamic, with the values obtained by the MDS from the information providers: e.g., total CPU number, amount of jobs, or available disk space. More details about these attributes can be found in the NorduGrid Information System description [3]. Each attribute (apart of the MDS time stamps) is linked to the Attributes Overview module (Section 2.6), such that clicking on an attribute name brings the list of the values of this particular attribute on all the NorduGrid clusters. For instance, this is the most convenient way to browse available disk space or runtime environment values over the system.
- 2) **Queues:** the list of queues at a given cluster, accessible by the NorduGrid users. While the detailed list of queue attributes and corresponding jobs can be obtained by clicking on a queue name (see Queue Details module description, Section 2.3), the most essential parameters are listed already in the Cluster Description module. They are: queue name, queue status, queue length (minimal and maximal), number of CPUs assigned to a queue (if available), and number of running and queued jobs. Since queues can be shared between Grid and local users, the total number of jobs is shown, with the number of Grid jobs in parentheses.

The Cluster Description module is linked from most other modules (except the List of Users one): clicking on a domain name of a cluster brings the Cluster Description window.

2.3 Queue Details

In the NorduGrid Information System, the `nordugrid-queue` objectclass is described by a set of queue-specific attributes, and has two sub-trees: `nordugrid-job` and `nordugrid-authuser`. This structure reflects the fact that users are not implicitly authorized to submit jobs to any queue. However, the list of users allowed to a specific queue is a fairly static information, and thus is beyond the scope of the Grid Monitor[†].

The Queue Details module provides the list of the queue attributes and of all the jobs scheduled (running or waiting) to this queue. Figure 3 shows the NorduGrid queue description window, with clickable fields marked by numbered tags as follows:

- 1) **Attributes:** the dump of the queue attributes. Just like the cluster attributes (Section 2.2), they can be both static and dynamic. Every attribute is linked to the Attributes Overview module (Section 2.6), which allows to browse the values of each attribute over all the NorduGrid system.

[†]List of queues available for a given user can be obtained through the User Information module

NorduGrid Cluster Details for grid.quark.lu.se Force refresh Print Close

| Attribute | Value |
|--|--|
| Distinguished name | nordugrid-cluster-name=grid.quark.lu.se,Mds-Vo-name=local,o=grid |
| objectClass | Mds |
| | nordugrid-cluster |
| Front-end domain name | grid.quark.lu.se |
| Cluster alias | Lund Grid Cluster |
| Contact string | gsiftp://grid.quark.lu.se:2811/jobs |
| E-mail contact | grid.siteadmin@quark.lu.se grid.support@quark.lu.se |
| LRMS type | OpenPBS |
| LRMS version | 2.3.12 |
| LRMS details | FIFO scheduler, single job per processors |
| Architecture | i686 |
| Operating sys 1 | Linux 2.4.3-20mdk |
| Homogeneous cluster | True |
| CPU type (slowest) | Pentium III (Coppermine) 1001 MHz |
| Memory (MB, smallest) | 256 |
| Total CPUs | 4 |
| CPU:machines | 2cpu:2 |
| Occupied CPUs | 3 |
| Queued jobs | 2 |
| Total amount of jobs | 5 |
| Local Storage Element | nordugrid-se-name=grid.quark.lu.se,Mds-Vo-name=Sweden,o=grid |
| Session directories area | /jobs |
| Unallocated disk space (MB) | 27834 |
| Grid middleware | globus-2.0-9ng nordugrid-HEAD |
| Runtime environment | ATLAS-3.0.1 ATLAS-3.2.1 DC1-ATLAS-3.2.1 |
| Mds-validfrom | 05-08-2002 19:23:44 |
| Mds-validto | 05-08-2002 19:24:14 |

| Queue | Status | CPU (min) | CPUs | Running | Queueing |
|-------|--------|------------|------|-------------|-------------|
| pc | active | 0 to 120 | N/A | 0 (Grid: 0) | 0 (Grid: 0) |
| pclo | active | 120 to inf | N/A | 3 (Grid: 3) | 2 (Grid: 2) |

Figure 2: NorduGrid cluster details

- 2) Cluster name: each queue is associated with the cluster, which name is shown at the top of the window. Clicking the cluster name brings up the Cluster Description window (Section 2.2).
- 3) Job name: from the Queue Details window, users can get access to detailed information about every job in the queue by clicking the job name. Each job name is linked to the Job Information module, described in Section 2.4.
- 4) Owner: The Grid authentication mechanism allows to associate every job with a corresponding user, even though an actual Unix account owner may be a generic "griduser". The Grid Monitor uses this feature to display explicitly each job owner. In the Queue Details window (as in all other modules), user's name is linked to the User Information module (Section 2.5), which displays all the resources available for a given user, as well as the list of user's jobs.

Queue Information module is accessible via links to queue names in the Cluster Information (Section 2.2), Job Information (Section 2.4), User Information (Section 2.5) and Attributes Overview (Sec 2.6) modules.

2.4 Job Information

The Job Information module is activated on three different occasions:

- To display a list of all running NorduGrid jobs on a cluster

Queue *dque* at *fire.ii.uib.no*

| Attribute | Value |
|--------------------|--|
| Distinguished name | nordugrid-queue-name=dque,nordugrid-cluster-name=fire.ii.uib.no,Mds-Vo-name=local,o=grid |
| objectClass | Mds |
| | nordugrid-queue |
| Queue name | dque |
| Queue status | active |
| Running jobs | 12 |
| Running Grid jobs | 4 |
| Queued jobs | 0 |
| Queued Grid jobs | 0 |
| Mds-validfrom | 2002-11-17 20:05:43 |
| Mds-validto | 2002-11-17 20:06:13 |

| Job name | Owner | Status | CPU (min) | Memory (KB) |
|--------------------------------|--------------|----------------------------------|-----------|-------------|
| 1 SpinS/Run28/tra512_1r28 | O. Syljuåsen | FINISHED at: 2002-11-17 16:25:40 | N/A | N/A |
| 2 SpinS/Run29/tra512_1r29 | O. Syljuåsen | FINISHED at: 2002-11-17 16:27:03 | 1439 | N/A |
| 3 SpinS/Run32/tra512_1r32 | O. Syljuåsen | FINISHED at: 2002-11-17 16:35:40 | 1439 | N/A |
| 4 SpinS/Run69/tra256_01r69 | O. Syljuåsen | FINISHED at: 2002-11-17 16:37:15 | 1439 | N/A |
| 5 SpinS/Run70/tra256_01r70 | O. Syljuåsen | FINISHED at: 2002-11-17 16:41:40 | 1439 | N/A |
| 6 SpinS/Run77/tra512_01r77 | O. Syljuåsen | FINISHED at: 2002-11-17 16:39:40 | 1439 | N/A |
| 7 SpinS/Run80/tra512_01r80 | O. Syljuåsen | FINISHED at: 2002-11-17 16:41:40 | 1439 | N/A |
| 8 SpinS/Run81/tra512_01r81 | O. Syljuåsen | FINISHED at: 2002-11-17 16:41:40 | 1439 | N/A |
| 9 SpinS/Run84/tra512_01r84 | O. Syljuåsen | FINISHED at: 2002-11-17 16:41:40 | 1439 | N/A |
| 10 SpinS/Run85/tra512_01r85 | O. Syljuåsen | FINISHED at: 2002-11-17 16:43:40 | 1439 | N/A |
| 11 SpinS/Run87/tra512_01r87 | O. Syljuåsen | FINISHED at: 2002-11-17 16:47:28 | 1439 | N/A |
| 12 SpinS/Run103/tra1024_01r103 | O. Syljuåsen | INLRMS: R | 539 | 434456 |
| 13 SpinS/Run102/tra1024_01r102 | O. Syljuåsen | INLRMS: R | 541 | 434456 |
| 14 SpinS/Run82/tra512_01r82 | O. Syljuåsen | INLRMS: R | 514 | 102652 |
| 15 SpinS/Run86/tra512_01r86 | O. Syljuåsen | INLRMS: R | 514 | 102644 |

Figure 3: NorduGrid queue details

- To display a list of all queued NorduGrid jobs on a cluster
- To show the full information on a given job

Lists of running and queued jobs are accessible from the top Grid Monitor window (Section 2.1) by clicking the corresponding fields (marked 2 and 3 in Figure 1). As shown in Figure 4, such a list contains not only job names, but also their respective owners, status (as returned by the Grid Manager), execution time (in case of running jobs), and the submission queue.

Running jobs at *tscf.nbi.dk*

| Job name | Owner | Status | CPU (min) | Queue |
|----------------------------|--------------|-----------|-----------|----------|
| 1 SpinS/Run27/tra512_1r27 | O. Syljuåsen | INLRMS: R | 519 | gridlong |
| 2 SpinS/Run31/tra512_1r31 | O. Syljuåsen | INLRMS: R | 519 | gridlong |
| 3 SpinS/Run71/tra256_01r71 | O. Syljuåsen | INLRMS: R | 510 | gridlong |

Figure 4: NorduGrid job list

Most of the fields in a job list window are linked to the corresponding monitor modules, giving access to more detailed information:

- 1) Job name: just like in the Queue Details window (Section 2.3), the job name is linked to the Job Information window, described below. However, while the Queue Details module lists the jobs in a given queue, the Job Information window gives an overview of all the NorduGrid jobs on a cluster.
- 2) Owner: this field is also identical to the one in the Queue Details window: user's name is linked to the User Information module (Section 2.5), which displays all the resources available for a given user and the list of user's jobs.
- 3) Queue: the name of the queue is linked to the Queue Details window (Section 2.3), which gives a snapshot of the queue status, including all the NorduGrid jobs submitted to a particular queue – running or waiting.
- 4) Cluster name: clicking on the cluster name brings up the Cluster Description window (Section 2.2), which gives a general overview of a given cluster and the status of its queues (those available for the NorduGrid users).

The job information window is invoked by clicking on a job name in any Grid Monitor window which lists jobs. It is handled by the same module which produces running/queued job list, and contains simple dump

| Attribute | Value |
|----------------------------------|---|
| Distinguished name | nordugrid-pbsjob-globalid=gsiftp://lscf.nbi.dk:2811/jobs/17462021731217695386 |
| objectClass | Mds |
| | nordugrid-pbsjob |
| ID | gsiftp://lscf.nbi.dk:2811/jobs/17462021731217695386 |
| Owner | /O=Grid/O=Nordugrid/OU=nbi.dk/CN=Jakob Langgaard Nielsen |
| Job name | dc1.002000.simul.01217.hlt.pythia_jet_17 |
| Job submission time (GMT) | 05-08-2002 12:21:11 |
| Execution queue | gridlong |
| Execution cluster | lscf.nbi.dk |
| Job status | INLRMS: R |
| Used CPU time | 421 |
| Used wall time | 422 |
| Used memory (KB) | 94764 |
| Requested CPU time | 2000 |
| PBS comment | Job started on Mon Aug 05 at 14:21 |
| Standard output file | dc1.002000.simul.01217.hlt.pythia_jet_17.log |
| Standard error file | dc1.002000.simul.01217.hlt.pythia_jet_17.log |
| Submission machine | 130.225.212.51:47832;lscf.nbi.dk |
| Mds-validfrom | 05-08-2002 19:25:41 |
| Mds-validto | 05-08-2002 19:26:11 |

Figure 5: Nordugrid job statistics

of all the available job attributes (see Figure 5). Just like in the Cluster Description and Queue Description windows, each attribute is clickable (as indicated by a tag numbered 1 in Figure 5), and is linked to the Attributes Overview module (Section 2.6). This is a convenient way to compare jobs that reside on the system.

2.5 User Information

The User Information module of the Grid Monitor gives access to all the available information, related to a given user. This includes the list of available resources (queues, processors and disk space), and the list of user jobs, residing on the system at the time of query. To collect this information, the whole system has to be queried, therefore invocation of this module typically takes quite a bit of time (at least comparing to most other modules).

Figure 6 shows a typical User Information window, where the numbered fields are linked to other Grid Monitor modules:

- 1) **Job name**: this field is linked to the Job Information window (Section 2.4), providing access to the detailed information on a given job. Unlike of Job Information or Queue Information modules, which list local to a cluster jobs, the User Information module collects all the jobs submitted by a given user to the whole system.
- 2) **Cluster**: since the User Information window displays all the jobs associated with a given user, description of each respective cluster is available by clicking the cluster name. This brings up a cluster description window, described in Section 2.2.
- 3) **Queue**: this field is linked to the Queue Details module (Section 2.3), thus giving access to the information about the status of the relevant queue.
- 4) **Cluster**: the upper part of the User Information window lists the Nordugrid resources, available for a user. Each cluster, to which a user is authorized to submit jobs, is indicated by its name. Cluster names are linked to the Cluster Description window (Section 2.2), giving detailed information on available resources.
- 5) **Queue**: since users authorization may be not only cluster-based, but also queue-based, the allowed queue information can be accessed by clicking a queue name. This brings up the Queue Details window, described in Section 2.3.

| Cluster:queue | Free CPUs | Exp. queue length | Free disk (MB) |
|--------------------------------|-----------|-------------------|----------------|
| pc30.hip.helsinki.fi:gridlong | 0 | 0 | 21983 |
| pc30.hip.helsinki.fi:gridshort | 0 | 0 | 21983 |
| pc30.hip.helsinki.fi:verylong | 0 | 0 | 21983 |
| grid.uio.no:default | 3 | 0 | 5004 |
| grid.uio.no:veryshort | 3 | 0 | 5004 |
| grid.fi.uib.no:default | 3 | 0 | 6905 |
| fire.ii.uib.no:dque | 50 | 0 | 509832 |
| lscf.nbi.dk:gridlong | 30:4320 | 0 | 101968 |
| lscf.nbi.dk:gridshort | 30:60 | 0 | 101968 |
| grid.nbi.dk:long | 3 | 0 | 28224 |
| grid.nbi.dk:short | 3:60 | 0 | 28224 |
| hepax1.nbi.dk:long | 1:4320 | 0 | 1724 |
| hepax1.nbi.dk:short | 1:60 | 0 | 1724 |
| sleipner.byggmek.lth.se:long | 4:2880 | 0 | 67755 |
| sleipner.byggmek.lth.se:short | 4:120 | 0 | 67755 |
| grendel.it.uu.se:nordugrid | 5 | 0 | 30439 |
| seth.hpc2n.umu.se:fque | 0 | 2 | 251717 |
| grid.quark.lu.se:pc | 3:120 | 0 | 33034 |
| grid.quark.lu.se:pclong | 3 | 0 | 33034 |

| Job name | Status | CPU (min) | Cluster | Queue |
|---------------|-----------|-----------|----------------------|----------|
| 1 BeamBeam_sl | INLRMS: R | 1575 | pc30.hip.helsinki.fi | verylong |

Figure 6: NorduGrid user information

The simplest way to access the User Information window is via the List of Users (Section 2.9), although it can be invoked from any Grid Monitor window where a user name is displayed (e.g., a Job Information or a Queue Details window).

2.6 Attributes Overview

As it was mentioned above, every NorduGrid objectclass attribute, appearing in a Grid Monitor window, is linked to the Attributes Overview module, which queries all the relevant objects on the system and delivers a comparative list of the attributes. Similarly to the User Information module, querying all the NorduGrid resources takes somewhat long time, as the Grid Monitor does not have an own cache.

This module can also be accessed via the “Match-it-yourself” interface (Section 2.7). In this case, it can list as many attributes as specified by a user request, eventually applying the user selection criteria.

| Name | Jobs, total amount |
|---|--------------------|
| 1 Cluster lscf.nbi.dk | 1 |
| 2 Cluster seth.hpc2n.umu.se | 69 |
| 3 Cluster login-3.monolith.nsc.liu.se | 426 |
| 4 Cluster grendel.it.uu.se ① | 6 |
| 5 Cluster farm.hep.lu.se | 31 |
| 6 Cluster ingvar.nsc.liu.se | 6 |
| 7 Cluster fire.ii.uib.no | 39 |

Figure 7: NorduGrid objects grouped by attribute

Figure 7 shows a typical result of the Attributes Overview query: in this example, the nordugrid-cluster attribute "Jobs, total amount" was queried, and a comparative list of results returned. The Resource field (indicated by the tag 1) depends on the nature of the attribute, and can be either of:

- cluster name, linked to the Cluster Description module,

- cluster name and queue name, linked to the Cluster Description and Queue Details modules respectively,
- job ID string (see ref.[6] for details), linked to the Job Information module.

2.7 “Match-it-yourself”

The “Match-it-yourself” is a customizable interface to the Attributes Overview module (Section 2.6). It allows users to choose which attributes of an object to display, optionally applying filters. While the other Monitor windows display a pre-defined set of data, this module gives an advanced user a possibility to build a customized request to the Information System.

An example use case for this interface could be a user desiring to view a list of his running (but not queued or finished) jobs, complete with used CPU and wall time, memory and job name. The “Match-it-yourself” tool would be then invoked for the job object, and the display request would contain Name, Used CPU time, Used wall time, Used memory (KB), and Status – the latter with a filter `Status = INLRMS: R`.

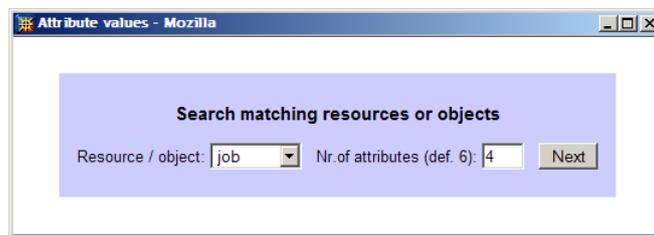


Figure 8: Object class selection window

Figure 8 shows the first screen of the “Match-it-yourself” interface, which welcomes users to select the object class to work with, and the amount of attributes to be displayed. When not sure about the latter, users should specify a top estimate – unused fields will be ignored in further searches.

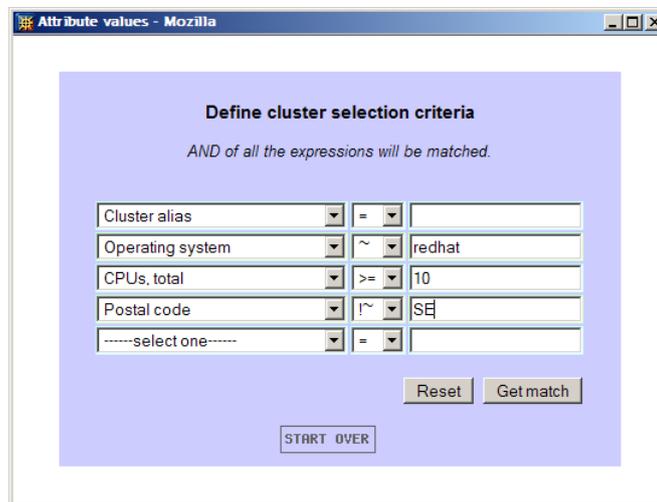


Figure 9: Attribute selection window

Figure 9 is a snapshot of the screen where the attributes to display and their selection criteria are specified. If a user wishes to display an attribute for all the objects, independently of its value, the rightmost field may be either kept empty, or filled with an asterisk (*), while the middle field should be set to “=”. Whenever a filter has to be applied, an operator should be selected in the middle column, and a match string specified in the rightmost field. For example, if only clusters containing “NBI” in their domain names have to be shown, the attribute filter would be `Front-end domain name ~ nbi`. Matches are case-insensitive.

Figure 10 is the result of the search according to the criteria defined in the example in Figure 9. Three filters were applied: on operating system attribute, total number of CPUs and postal code (in this case we were selecting any cluster which is not in Sweden). Since we wanted to display each cluster’s alias as well, this

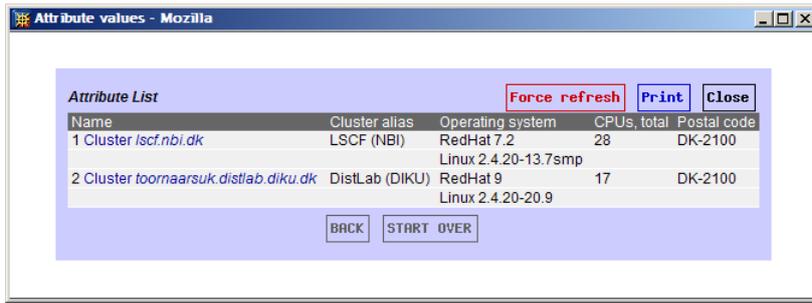


Figure 10: Customized cluster information display

attribute was added to the selection, but with a “match everything” scope. The attribute matching method is exactly the same as used by the Attributes Overview module (Section 2.6), and it re-uses the screen layout shown in Figure 7.

2.8 Storage Resources

Although there is no well-defined Storage Element concept in the NorduGrid, some information about the storage resources can be found in the Information System. The Storage Resources module, linked from the main Monitor window, displays all the available information for those Storage Elements which publish it. Particularly important is the base URL, which specifies the Grid mount point that could be used in job descriptions.

The screenshot shows a Mozilla browser window titled 'Nordugrid Storage Elements - Mozilla'. It displays a table of storage elements with the following data:

| Name | Space (MB) | Address | Base URL | Type |
|-----------------|------------|-----------------------------|--|---------------|
| LSCF SE | 3393 | lscf.nbi.dk | gsiftp://lscf.nbi.dk:2811/ | gridftp-based |
| Oslo SE dc2 | 845 | dc2.uio.no | gsiftp://dc2.uio.no:2811/dc1/ | gridftp-based |
| Oslo SE dc4 | 616169 | dc4.uio.no | gsiftp://dc4.uio.no:2811/dc1/ | gridftp-based |
| Oslo SE dc3 | 974856 | dc3.uio.no | gsiftp://dc3.uio.no:2811/dc1/ | gridftp-based |
| Oslo SE dc1 | 0 | dc1.uio.no | gsiftp://dc1.uio.no:2811/dc1/ | gridftp-based |
| HPC2N SE DC1 | 52881 | seth.hpc2n.umu.se | gsiftp://seth.hpc2n.umu.se:2811/dc1/ | gridftp-based |
| Linkoping stora | 819604 | login-3.monolith.nsc.liu.se | gsiftp://login-3.monolith.nsc.liu.se:2811/se1/ | gridftp-based |
| Uppsala Atlas M | 461 | grid.tsl.uu.se | gsiftp://grid.tsl.uu.se:2811/atlas | gridftp-based |
| Lund SE 1 | 1380731 | hathi.hep.lu.se | gsiftp://hathi.hep.lu.se:2811/nordugrid | gridftp-based |

Buttons for 'Force refresh', 'Print', and 'Close' are visible at the top right. A timestamp '2003-09-04 CEST 22:05:42' is shown at the top left.

Figure 11: List of storage elements

2.9 List of Users

The List of Users module is different from the rest of the Grid Monitor modules because it does not deal with the NorduGrid MDS. Instead, it retrieves lists of users from the NorduGrid VO database [7]. It serves as a link between the two databases (MDS and VO), by interfacing each user record to the User Information module (Section 2.5). Figure 12 shows a screenshot of a typical VO user list, with numbered tags indicating clickable links as follows:

- 1) Name: user name as given in the corresponding Grid certificate field, linked to the User Information module (Section 2.5).
- 2) E-mail: E-mail address of a user, if available. It is linked to an e-mail URL, allowing to send a message to a user directly from the browser (if such an option is enabled in a browser).

The List of Users is available only from the top Grid Monitor window.

| Name | Affiliation | E-mail |
|------------------------|--|------------------------------|
| Chafik Driouichi | Elementary Particle Physics, Lund University, Sweden | chafik.driouichi@lund.se |
| Paula Eerola | Elementary Particle Physics, Lund University, Sweden | paula.eerola@lund.se |
| Mattias Ellert | Department of Radiation Sciences, Uppsala University, Sweden | mattias.ellert@u.se |
| Borge Kile Gjelsten | Department of Physics, University of Oslo, Norway | b.k.gjelsten@fys.uio.no |
| Nils Gollub | Department of Radiation Sciences, Uppsala University, Sweden | nils.gollub@u.se |
| Lars Melwyn Jensen | Nordita, Copenhagen, Denmark | melwyn@nordita.dk |
| Aleksandr Konstantinov | Department of Physics, University of Oslo, Norway | alek.konstantinov@fys.uio.no |
| Balazs Konya | Elementary Particle Physics, Lund University, Sweden | balazs.konya@lund.se |
| Ulf Minnemark | Elementary Particle Physics, Lund University, Sweden | ulf.minnemark@lund.se |

Figure 12: List of the NorduGrid users

3 Implementation notes

The Grid Monitor is implemented entirely in PHP, with optional usage of client-side JavaScript. Since all the databases the Grid Monitor has to deal with are hierarchical LDAP ones, the server-side LDAP module of PHP is absolutely necessary to be enabled in order to make the Grid Monitor functioning. The PHP LDAP module conveniently allows parallel LDAP searches, – the feature heavily used by the Grid Monitor, since it speeds up the data retrieval[‡].

The Grid Monitor does not use any disk caching, storing all the LDAP query results in the memory. To minimize the memory usage, only the attributes relevant to each query are retrieved.

In order to speed up the queries, the Grid Monitor makes as little use of the MDS information propagation mechanisms as possible. GIIS and GRIS services are used only as link collections[§].

Since the NorduGrid architecture makes use of several equivalent top-level GIIS servers, the Grid Monitor queries all of them in order to have a reliable access to all the system information. In some cases, lower-level GRIS servers can also be duplicated, hence the Grid Monitor contains a built-in mechanism to prevent double-counting.

Discovery of lower-level GRIS servers is done recursively, starting from the registration information in all the top-level indexes, and ending at the local level. This recursive search method is invoked not only to discover clusters in e.g., the main Monitor module, but also to locate storage facilities.

All the Grid Monitor windows are automatically refreshed by the means of the built-in browser HTML instructions. Every window can be forcefully refreshed, printed and closed by using either standard browser tools, or the provided JavaScript-enabled buttons.

In the top Grid Monitor window, clusters are automatically grouped by respective second-level hierarchy MDS VOs – in the described above case, this is nothing but countries.

Such fields as cluster aliases, user names and attribute names, are customizable, and can be adjusted from the stored in the MDS values to any more appropriate ones, depending on the actual requirements.

In general, the Grid Monitor was designed to be a cross-browser, cross-platform tool, and have been shown to work properly with browsers ranging from Lynx to Konqueror to Microsoft Internet Explorer.

References

- [1] *The Monitoring and Discovery Service*. [Online]. Available: <http://www.globus.org/mds>
- [2] *The NorduGrid Project*. [Online]. Available: <http://www.nordugrid.org>
- [3] B. Kónya, *The NorduGrid Information System*. [Online]. Available: <http://www.nordugrid.org/documents/ng-infosys.pdf>

[‡]NorduGrid uses the OpenLDAP implementation with several bug fixes.

[§]Globus MDS2.2 provides a quick access to the lower level servers via a base scope LDAP search for the "giisregistrationstatus" attribute

- [4] *Open source implementation of the Lightweight Directory Access Protocol*. [Online]. Available: <http://www.openldap.org>
- [5] *PHP: Hypertext Preprocessor*. [Online]. Available: <http://www.php.net>
- [6] A. Konstantinov, *The NorduGrid Grid Manager*. [Online]. Available: <http://www.nordugrid.org/documents/GM.pdf>
- [7] *Description of the NorduGrid Virtual Organisation*. [Online]. Available: <http://grid.quark.lu.se/NorduGridVO/vo-description.html>

Index

| | | | |
|---------------------------|----------|------|--|
| | A | | |
| attributes | | 8 | |
| | B | | |
| browsers | | 11 | |
| | C | | |
| cluster | | 4 | |
| alias | | 3 | |
| attributes | | 4 | |
| load | | 3 | |
| | D | | |
| disk space | | 4 | |
| | E | | |
| E-mail | | 10 | |
| | G | | |
| grid monitor | | 3 | |
| | J | | |
| job | | 4 | |
| on cluster | | 6 | |
| by user | | 7 | |
| in a queue | | 5 | |
| information | | 6 | |
| name | | 5 | |
| owner | | 5 | |
| parallel | | 4 | |
| queued | | 6 | |
| queueing | | 4 | |
| running | | 4, 5 | |
| | M | | |
| Match it yourself | | 9 | |
| Match-it-yourself | | 4 | |
| modules | | 2 | |
| | N | | |
| nordugrid-authuser | | 2 | |
| nordugrid-cluster | | 2 | |
| nordugrid-job | | 2 | |
| nordugrid-queue | | 2 | |
| | O | | |
| objectclass | | 2 | |
| | Q | | |
| queue | | 4 | |
| attributes | | 4 | |
| length | | 4 | |
| list | | 4 | |
| name | | 4 | |
| | R | | |
| resources | | 7 | |
| runtime environment | | 4 | |
| | S | | |
| storage | | 4 | |
| Storage Element | | 10 | |
| Storage resources | | 10 | |
| | U | | |
| user information | | 7 | |
| user list | | 10 | |